


8	7	<u>б</u>	5	4	


middle sealing lip alternatively bent only for: mittlere Dichtlippe wahlweise gedreht nur fuer: ID-Nr.: 401 257 / Part-No.: 15327918 ID-Nr.: 406 131 / Part-No.: 15327913 ID-Nr.: 406 129 / Part-No.: 15339412

revolve round optionally interupt injection point possible umlaufend wahlweise unterbrochen



parting line / injection point possible Werkzeugtrennung / Anspritzung moeglich

									_							
n mm² altern. t mm² wahlw.	Color SIM			Dimension Ø Mass Ø						PART-NO.	INNER	-CONTU	₹E			
FLRY	Farbe	RAL	a±0,1	b±0,2	c±0, 2	d±0,1	e ^{+0,1} -0,2	f±0,2		33120594	INNER	E KONTU	JR _	2.5 ±0.		±0.1
-terminal 1,5 mi achsteckhuelse	m and tab-ter 1,5 mm und Fl	minal 1,5 lachsteck	mm <er 1,5<="" td=""><td>mm</td><td></td><td></td><td></td><td></td><td></td><td>33120598</td><td>±0.1</td><td>1</td><td></td><td>+</td><td><u> </u> ∠.</td><td>I ±0.1</td></er>	mm						33120598	±0.1	1		+	<u> </u> ∠.	I ±0.1
0,08–0,13	black schwarz	9011			2,6	3,9	2,6				- - - - -					7
											0		///		\mathbb{P}	
0,35–0,5	wine red weinrot	3027	0,8	1,4	2,6	3,9	2,6				•			╞╤╤		
												† <u>//</u>		\mathbb{Z}	//	
0,35–0,5	yellow gelb	1016	0,8	1,4	2,6	3,9	2,6									/
0,5–1,0	gray grau	7000	1,0	1,9	2,6	3,9	2,6					3.1	5 ±0.15	-		
0,5–1,0	green gruen	6010	1,0	1,9	2,6	3,9	2,6									
0,75-1,5 (8)	maize maisgelb	1007	1,5	1,9	2,6	3,9	2,6		9)						
0,5–1,0	yellow gelb	1016	1,0	1,9	2,6	3,9	2,6									
0,5–1,0	green gruen	6010	1,0	1,9	2,6	3,9	2,6		7)						
-terminal 2,8 m achksteckhuelse		-		3 mm												
0,08–0,13	wine red weinrot	3027			3,4	5,65	4,5					Re	emarks :			
0,35–1,0	blue blau	5010	0,8	1,6	3,4	5,65	4,5							icone, self-lı Inght: Rm m		-
0,35–1,0	gray grau	7000	0,8	1,6	3,4	5,65	4,5		1)		G	ap agumer	tation > 37	5% DIN	53 504-
0,35–1,0	orange orange	2004	0,8	1,6	3,4	5,65	4,5						zoneresista auged on	ant, heatresi testboard	stant -4	0 to +1
1,5	red / brown rot / braun	3011	1,6	2,2	3,4	5,65	4,5									
2,5	maize maisgelb	1007	2,2	3,0	3,4	5,65	4,5		9)		Be	emerkunger	1:		
-terminal 4,8 m achsteckhuelse		-		ШШ										Silikon, selbs t: Rm min. (-
0,35–1,0	yellow gelb	1016	0,8	1,6	6,0	9,0	7,2	3,4				R	eissdehnun	g > 375%	DIN 53 5	04–S2
1,5	white weiss	9010	1,6	2,2	6,0	9,0	7,2	3,7						ndig, tempera n Pruefplatt		endig -4
2,5 – 4,0	red / brown rot / braun	3011	2,2	З,0	6,0	9,0	7,2	4,1	0)						
	green gruen	6010	3,2	3,9	6,0	9,0	7,2	4,6								
	gray grau	7000	3,8	4,8	6,5	9,0	7,2	5,15								
2,5 - 4.0	blue blau	5010	2,2	З,0	6,0	9,0	7,2	4,1	9)			PF	I TO CHECH RUEFMASSE	FROM	DIMENSI NENNMA 0
2,5 - 4.0	green gruen	6010	2,2	3,0	6,0	9,0	7,2	4,1]7)			() DIN HI	/ FOR HELF		25 ICE UNLES <u>ALLGEM</u>
													THE	ORETIC DI	M L	±0.3 NGULAR WINKEL
8		7	2				6				5			4		

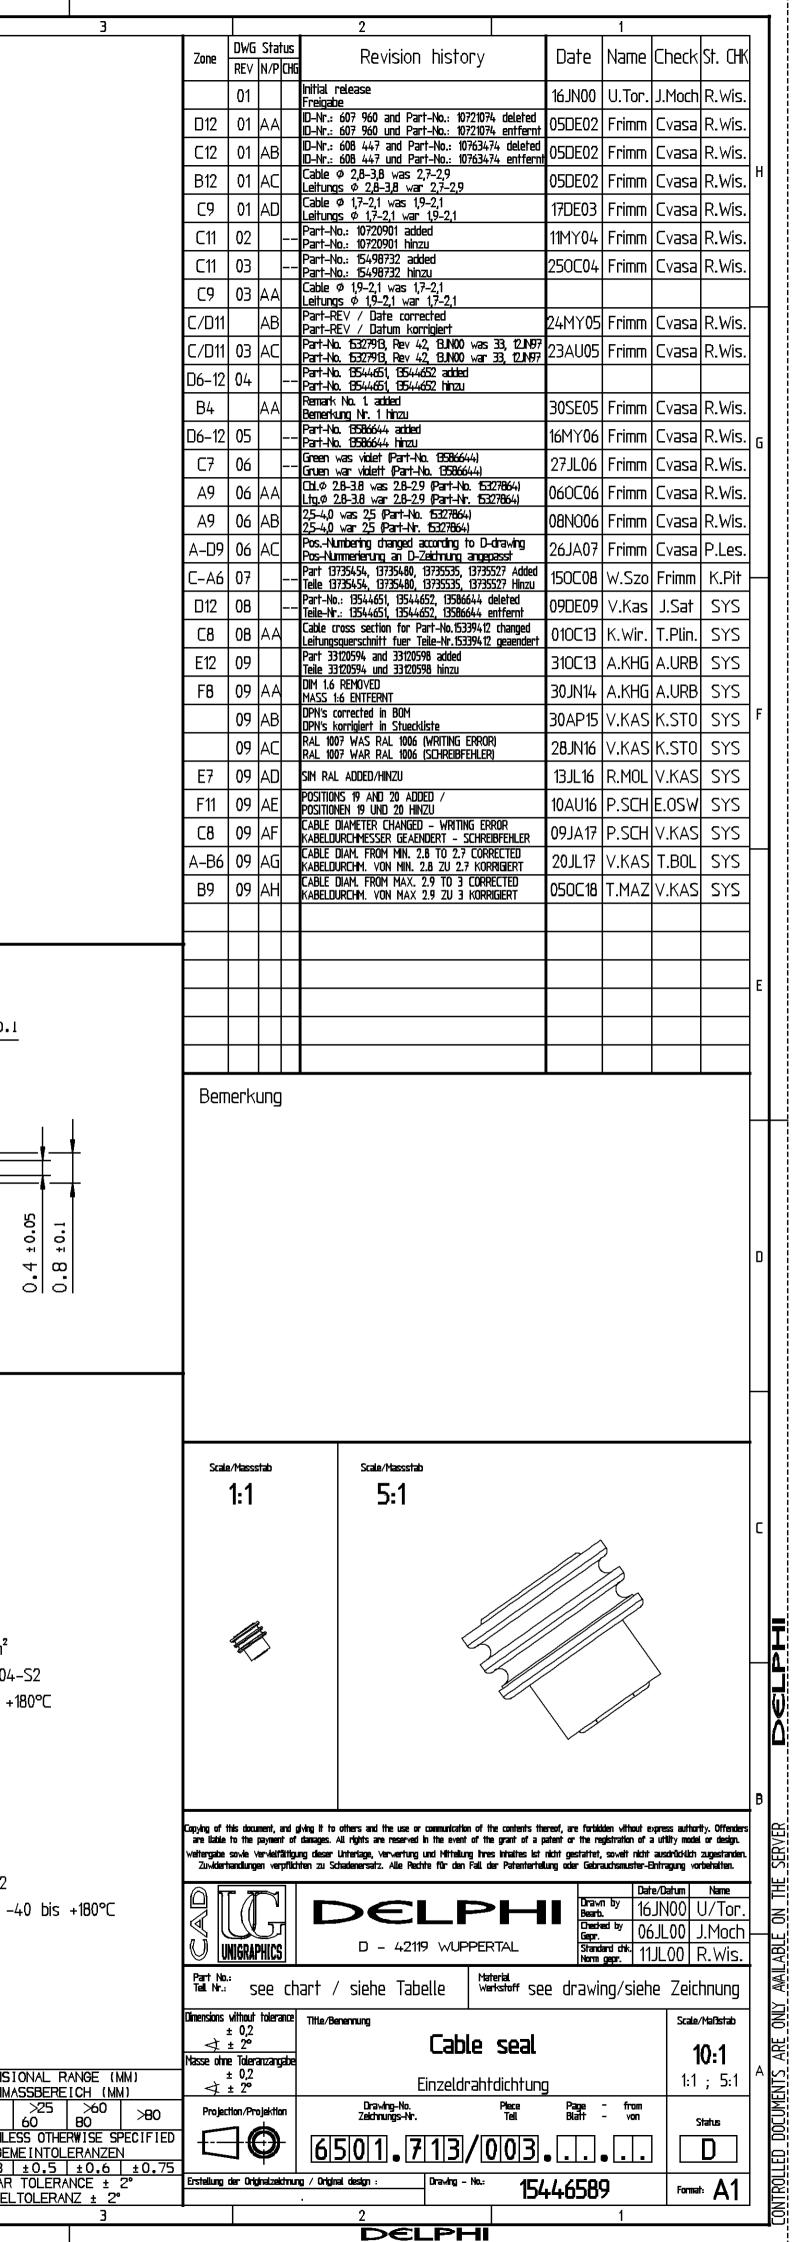

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aptiv:

15327859